
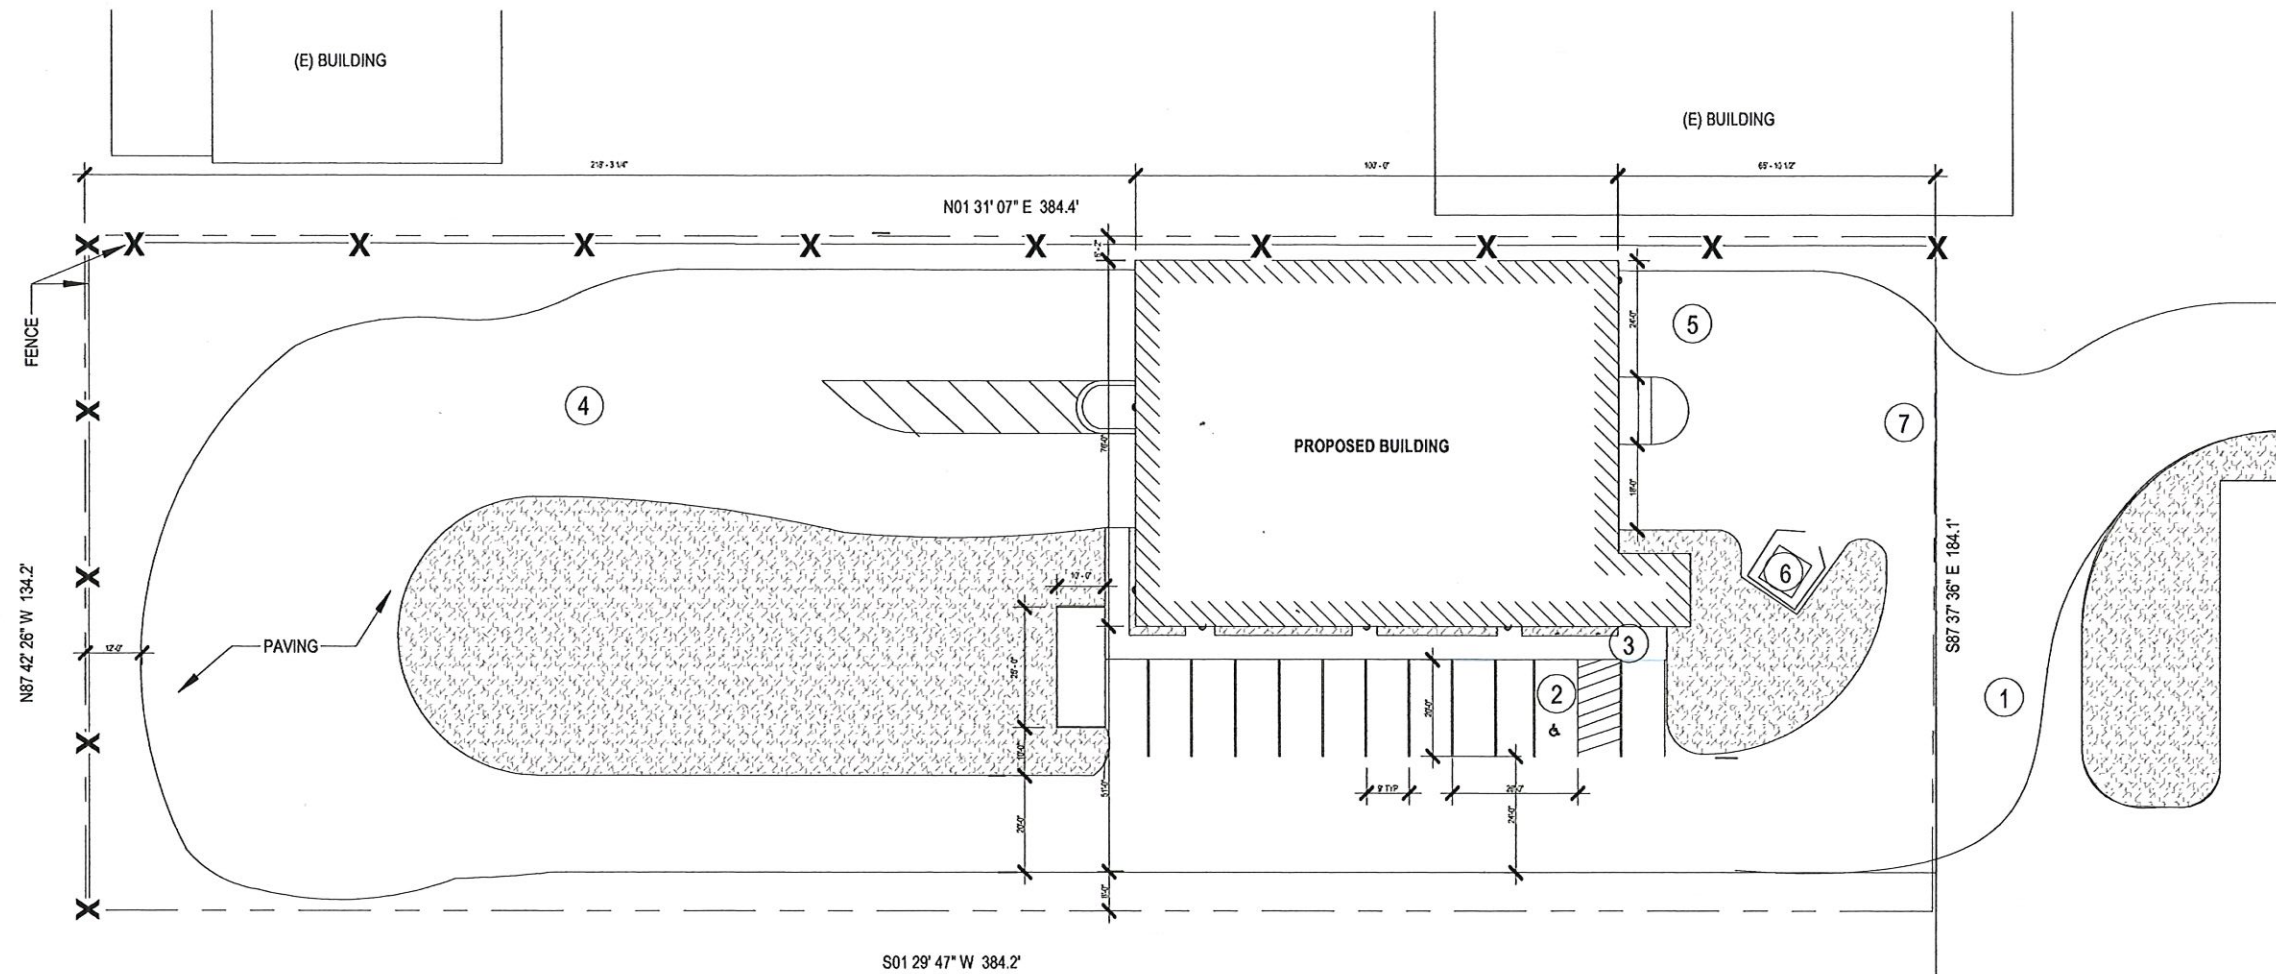


**SITE PLAN:**

①	ENTRY
②	PARKING: 1 ADA, 11 STANDARD
③	LOBBY ENTRY
④	TRUCK BUILDING ENTRY
⑤	TRUCK BUILDING EXIT
⑥	REFUSE AREA
⑦	TRUCK EXIT

**LEGEND:**

- — — — — PROPERTY LINE
- X -X -X -X -X - FENCE LINE
-  LANDSCAPING




ISSUE:	SPR SET
DATE:	05/12/2022
PAGE:	PRE.01









01 SITE PLAN  
1" = 40'-0"

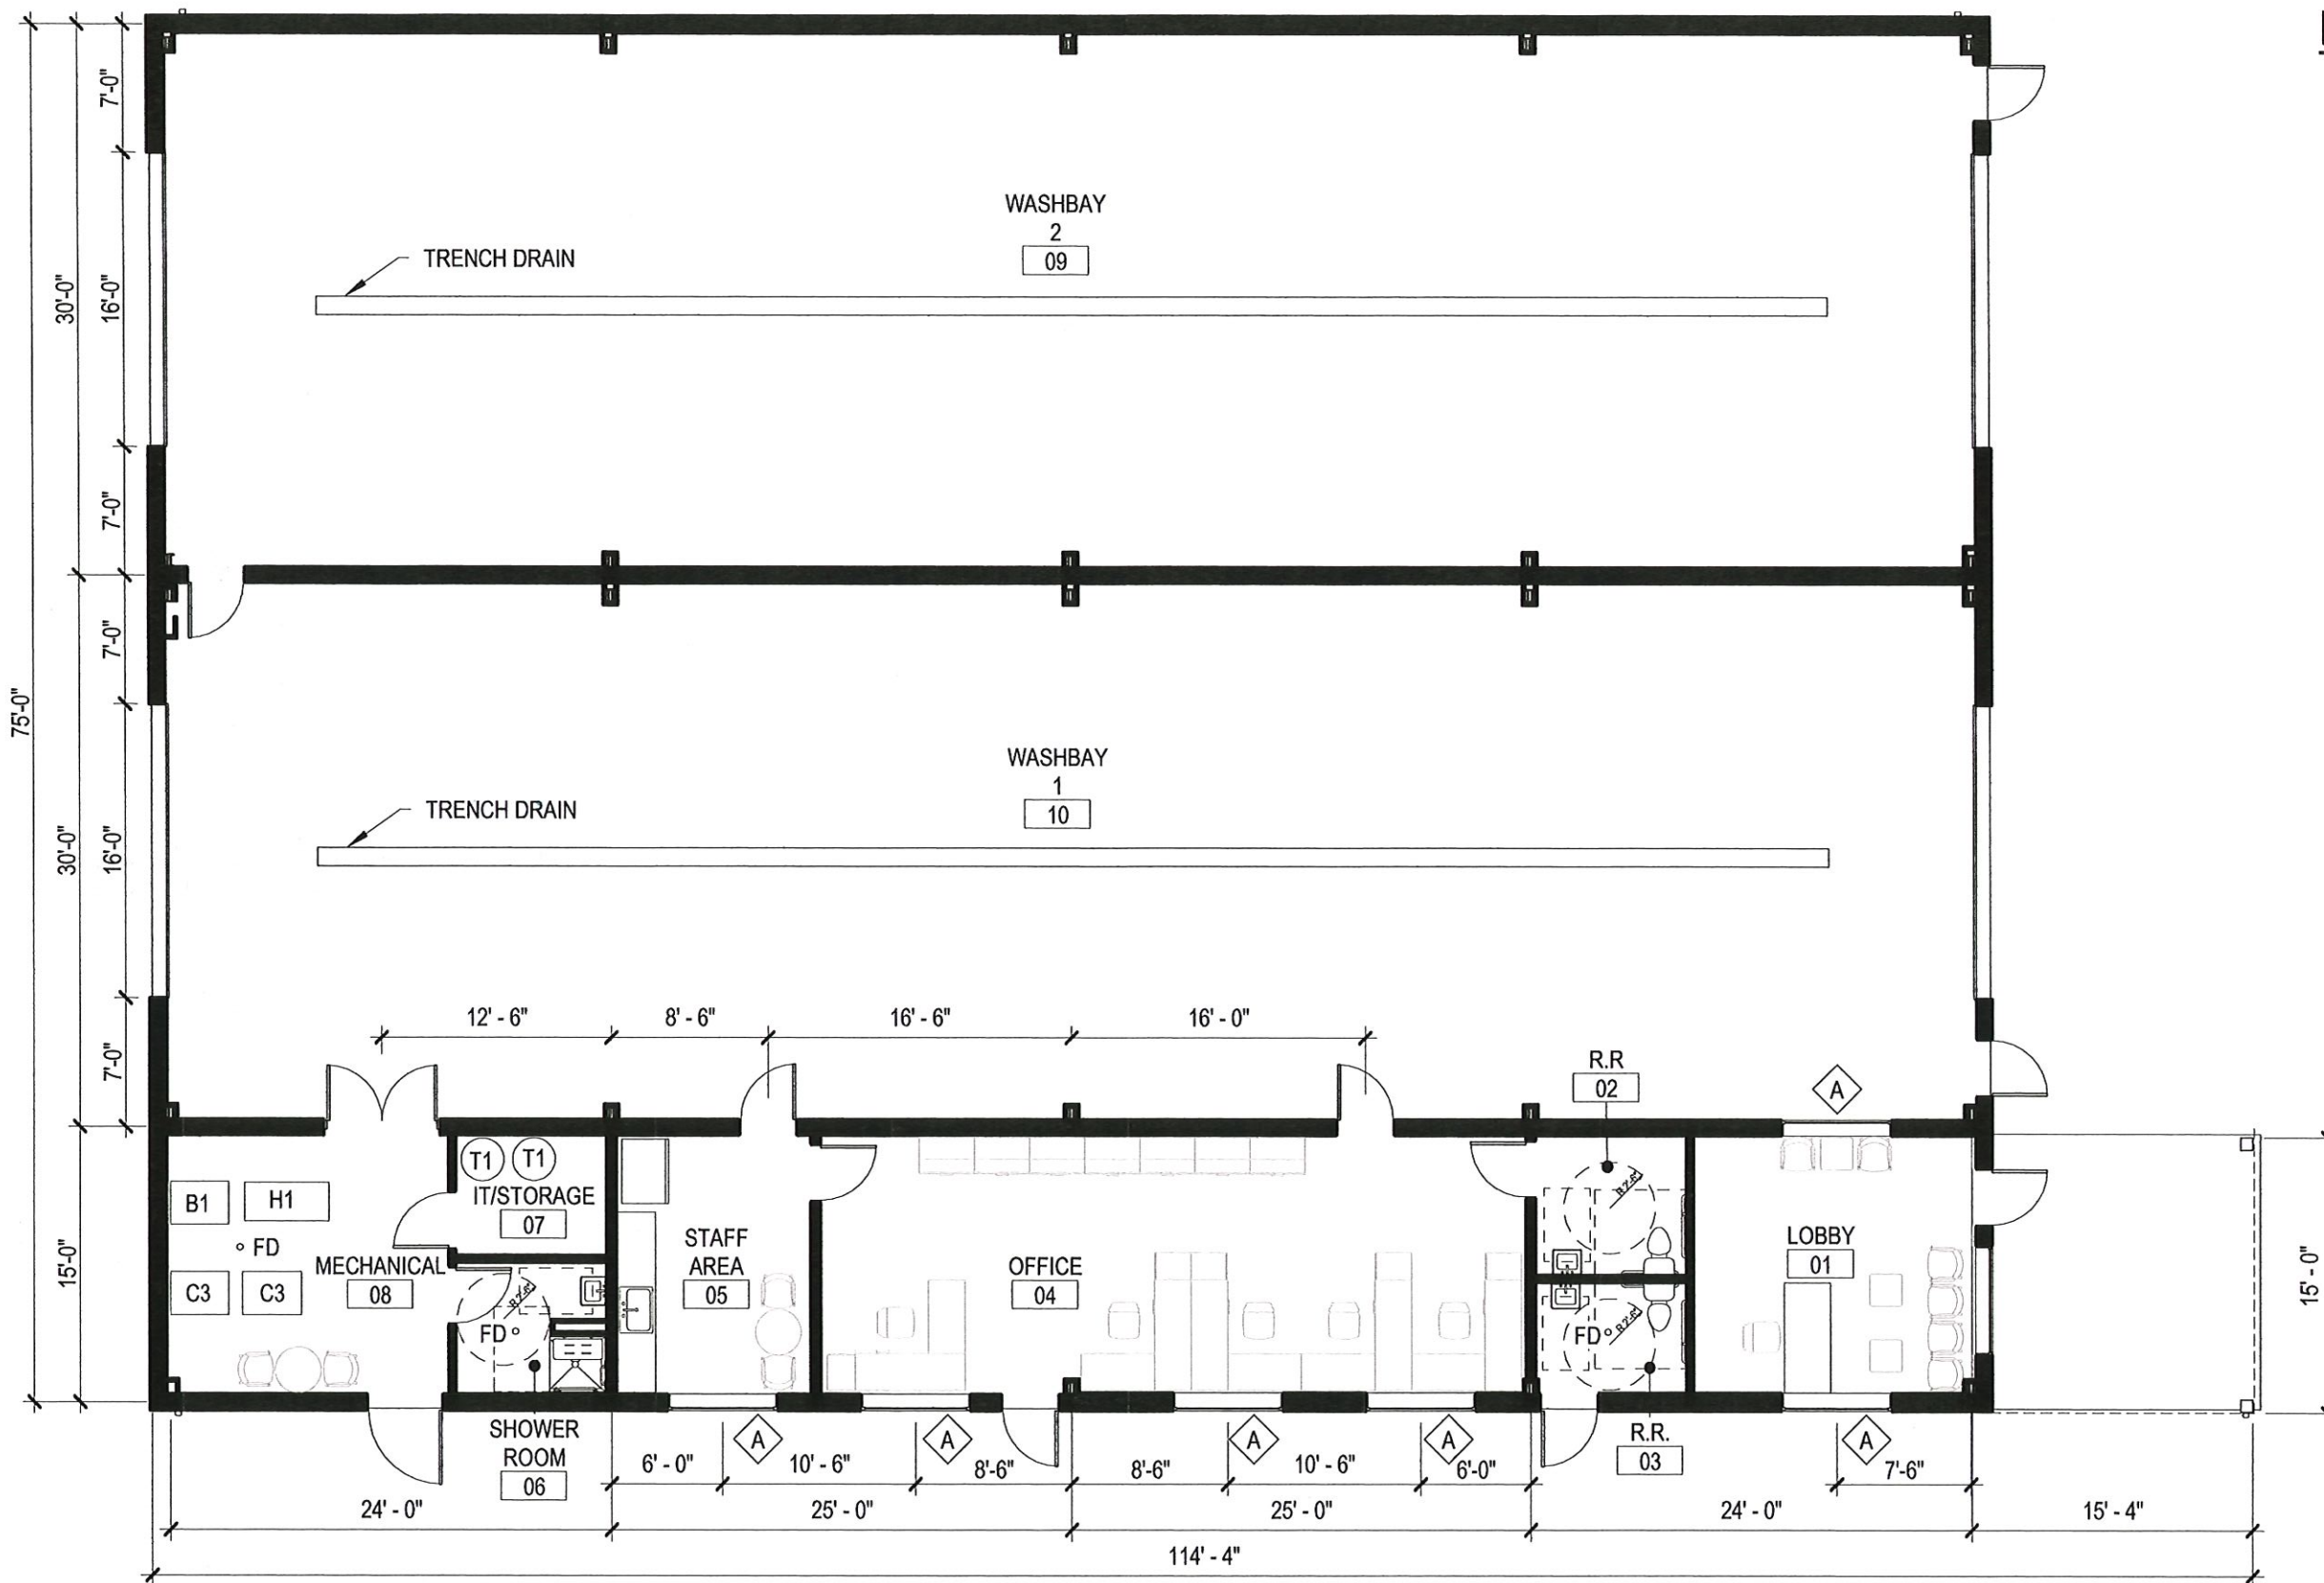

SITE




**LEGEND:**

-  NEW DOOR
-  NEW WALL
-  WINDOW TAG
-  100 GALLON STORAGE TANK
-  HOT WATER MECHANICAL UNIT
-  BOILER
-  COLD WATER UNITS STACKED 3 HIGH
-  FLOOR DRAIN

ISSUE:	SPR SET
DATE:	05/12/2022
PAGE:	PRE.02

**01 FLOOR PLAN**  
1" = 10'-0"  
**FLOOR PLAN**




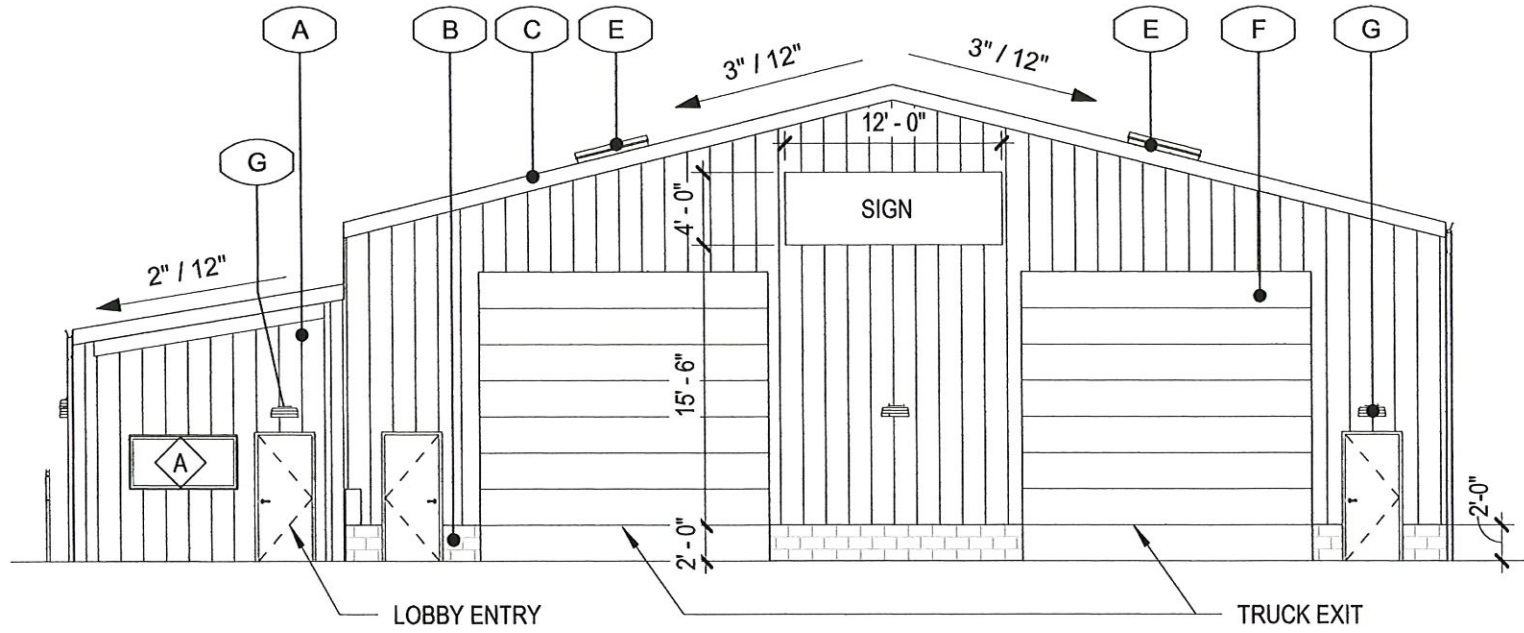

**EXTERIOR FINISH LEGEND:**

(A)	VERTICAL PANEL	TYPE: PBR	FINISH: CHARCOAL GRAY
(B)	CMU	TYPE: GROUND FACE	FINISH: CHARCOAL
(C)	BUILDING TRIM/ GUTTERS	TYPE: MBCI	FINISH: RUSTIC RED
(D)	METAL ROOFING	TYPE: DLK	FINISH: POLAR WHITE
(E)	SKYLIGHTS	TYPE: INTEGRATED CURB	
(F)	OVERHEAD DOOR		
(G)	EXTERIOR LIGHT	TYPE: WSR LED - LITHONIA	FINISH: BLACK

**01 NORTH ELEVATION**  
3/32" = 1'-0"

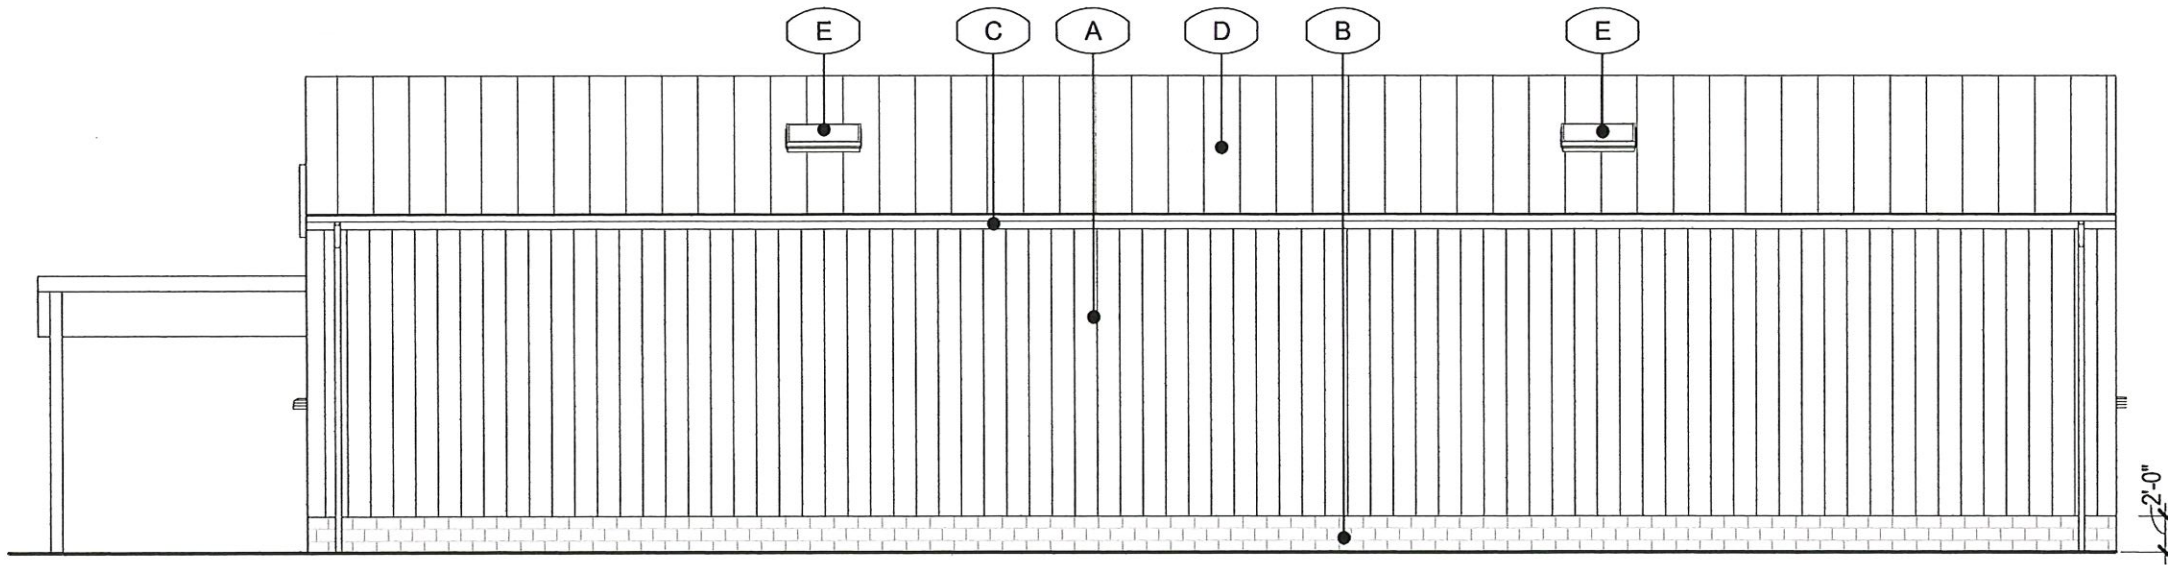

**02 EAST ELEVATION**  
3/32" = 1'-0"

ISSUE:	SPR SET
DATE:	05/12/2022
PAGE:	PRE.04

**EXTERIOR ELEVATIONS**




# WSR LED Architectural Wall Sconce



Inverted available with  
WLU option only.


## Specifications Luminaire

**Height:** 7-1/4"  
(18.4 cm)  
**Width:** 18"  
(45.7 cm)  
**Depth:** 9"  
(22.8 cm)  
**Weight:** 17 lbs  
(7.7 kg)



## Optional Back Box (BBW)

**Height:** 4"  
(10.2 cm)  
**Width:** 5-1/2"  
(14.0 cm)  
**Depth:** 1-1/2"  
(3.8 cm)

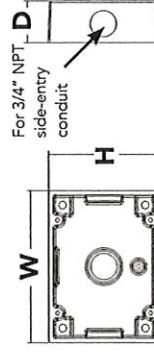

Catalog Number	
Notes	
Type	

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The classic Architectural Wall Sconce is now available with the latest in LED technology. The result is a long-life, maintenance-free product with typical energy savings of 75% compared to metal halide versions. The integral battery backup option provides emergency egress lighting, without the use of a back-box or remote gear, so installations maintain their aesthetic integrity.

The WSR LED is ideal for replacing existing 50 – 175W metal halide wall-mounted products. The expected service life is 20+ years of nighttime use.

## Ordering Information

**EXAMPLE: WSR LED 2 10A700/40K SR3 MVOLT DBBTD**

WSR LED	Performance Package	Distribution	Voltage	Mounting	Options <sup>1</sup>	Finish (required)
<b>Series</b>	<b>Light Engines</b>	<b>Distribution</b>	<b>Voltage</b>	<b>Mounting</b>	<b>Options<sup>1</sup></b>	<b>Finish (required)</b>
WSR LED	<b>700 mA options:</b> 10A700/30K 3000K 10A700/40K 4000K 10A700/50K 5000K	SR2 Type II SR3 Type III SR4 Type IV	MVOLT <sup>1</sup> 120 <sup>1</sup> 208 <sup>1</sup> 240 <sup>1</sup> 277 <sup>1</sup> 347 480	<b>Shipped included</b> (blank) Surface mount <b>Shipped separately<sup>2</sup></b> BBW Surface-mounted back box UTS Upright 5 degrees	<b>Shipped installed</b> PE Photoelectric cell, button type <sup>4,5</sup> SF Single fuse (120, 277, 347V) <sup>4</sup> DF Double fuse (208, 240, 480V) <sup>4</sup> DMG 0-10V dimming driver (no controls) ELCW Emergency battery backup <sup>6</sup> WLU Wet location door for up orientation <sup>7</sup> PIR Motion/ambient light sensor <sup>8</sup> DS Dual switching <sup>9</sup> SPD Separate surge protection <sup>10</sup>	DB8XD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DS5XD Sandstone DBBTDX Textured dark bronze DBLBDX Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone
				<b>Shipped separately</b> VG Vandal guard WG Wire guard		

## Emergency Battery Operation


The emergency battery backup (ELCW option) is integral to the luminaire - no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product.

All ELCW configurations include an independent secondary driver with an integral relay to immediately detect AC power loss. Dual light engines are wired in parallel so both engines operate in emergency mode and provide additional component redundancy. These design features meet various interpretations of NFPA 70/NEC 2008 - 700.1.6

The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time supply power is lost, per International Building Code Section 7006 and NFPA 101 Life Safety Code Section 7.9, provided luminaires are mounted at an appropriate height and illuminate an open space with no major obstructions.

The examples below show illuminance of 1 fc average and 0.1 fc minimum of the single-engine, Type IV product in emergency mode.

WSR LED 1 10A700/40K SR4  
MVOLT ELCW  
10' x 10' Gridlines  
8' and 12' Mounting Height

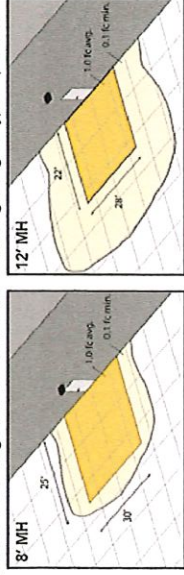

## NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with photocell (PE), fusing (SF, DF), or dual switching (DS).
- May also be ordered separately as an accessory. Ex: WSBW DBBBD U. Must specify finish.
- Must be ordered with fixture; cannot be field installed.
- Not available with MVOLT option. Burton photocell (PE) can be ordered with a dedicated voltage option. Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Not available with 480V option. Not available with motion/ambient light sensor (PIR).
- Integral battery pack is rated for -20° to 60°C operating temperature. ELCW warranty is 3-year period. Not available with 347V or 480V. Not available with WLU. Not available with ELCW.
- WLU not available with PIR or ELCW.
- Specifies the SensorSwitch SFOD-7-ODP control (photocell included); see Motion Sensor Guide for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with WLU, VG or WG.
- Provides 50/50 luminaire operation via two independent drivers and light engines on two separate circuits. Not available with one engine, MVOLT, ELCW, WLU, SF, or DF. Must specify voltage; voltage must be the same for both drivers. When ordered with photocell (PE) or motion sensor (PIR), only the primary power source leads will be controlled.
- See electrical section on page 2 for more details.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com  
© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

WSR-LED  
Rev. 10/06/16

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts.

Light Engines	Drive Current (mA)	Performance Package	System Watts (M/VOLT)	Dist. Type	40K (4000K, 70 CRI)					
					Normal Lumens	B	U	G	L	LPW
1 (10 LEDs)	700	10A700-K	24W	SR2	2,005	1	0	0	1	84
				SR3	2,029	1	0	0	1	84
				SR4	1,959	1	0	0	1	82
2 (20 LEDs)	700	10A700-K	47W	SR2	3,944	1	0	0	1	84
				SR3	4,028	1	0	0	1	86
				SR4	3,851	1	0	0	1	82

1 See electrical load chart for 347/480V system watts.

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C	1.10
10°C	1.06
20°C	1.02
25°C	1.00
30°C	0.98
40°C	0.92

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the WSR LED 2 10A700 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LMF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.94	0.88	0.77

### Electrical Load


Light Engines	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
1	700	24W	0.24	0.14	0.12	0.1	-	-
			29W <sup>1</sup>	-	-	-	0.09	0.07
2	700	47W	0.44	0.27	0.23	0.20	-	-
			53W <sup>1</sup>	-	-	-	0.17	0.12

1 Higher wattage is due to electrical losses from step-down transformer.

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's WSR LED homepage.

Isocandela plots for the WSR LED 2 10A700/40K SR2, SR3, and SR4. Distances are in units of mounting height (12).

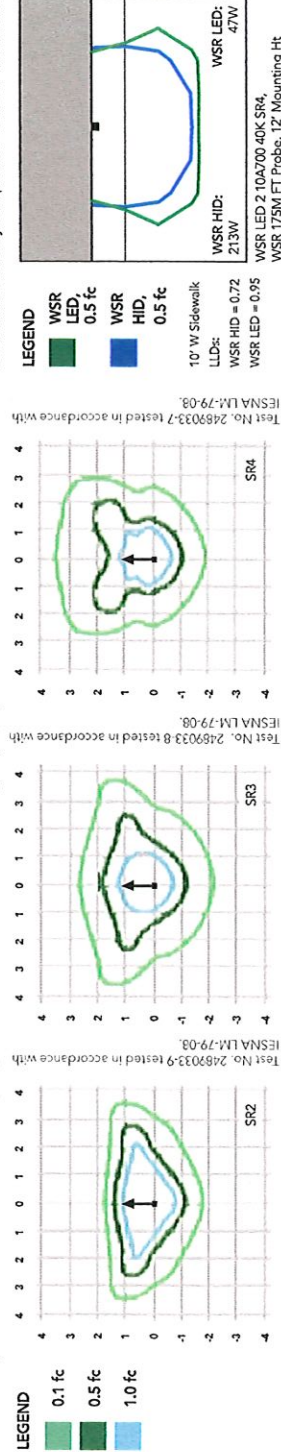

## FEATURES & SPECIFICATIONS

### INTENDED USE

The classic architectural shape of the WSR LED was designed for applications such as hospitals, schools, malls, restaurants, and commercial buildings. The long life LEDs and driver make this luminaire nearly maintenance-free.

### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Precision-molded acrylic lenses are engineered for superior distribution, uniformity, and spacing in wall-mount applications. Light engines are 4000K (70 CRI). The WSR LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal core circuit board and integral aluminum heat sinks to maximize heat dissipation and promote long life (100,000 hrs at 25°C, L77). Class 2 electronic driver has a power factor >90%, THD <20%. The electronic driver has a power factor of >90%, THD <20%, and a minimum 2.5 KV surge protection. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C low operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections.

### LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP65 rated; luminaire is IP65 rated and suitable for wet locations when mounted with the lenses down. WLU option offers wet location listing in "up" orientation. Rated for -30°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/terms_and_conditions.aspx).

**Notes:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • [www.lithonia.com](http://www.lithonia.com)

© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

WSR-LED

Rev. 10/06/16